
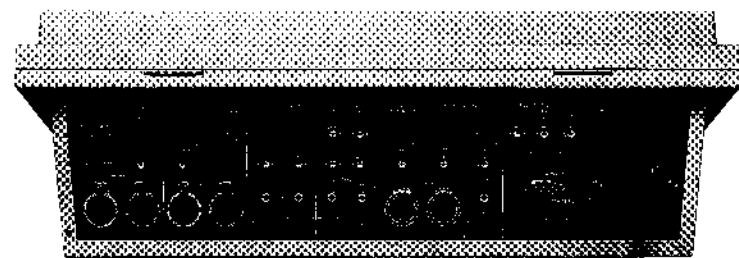


WJ-MX50 Digital AV Mixer

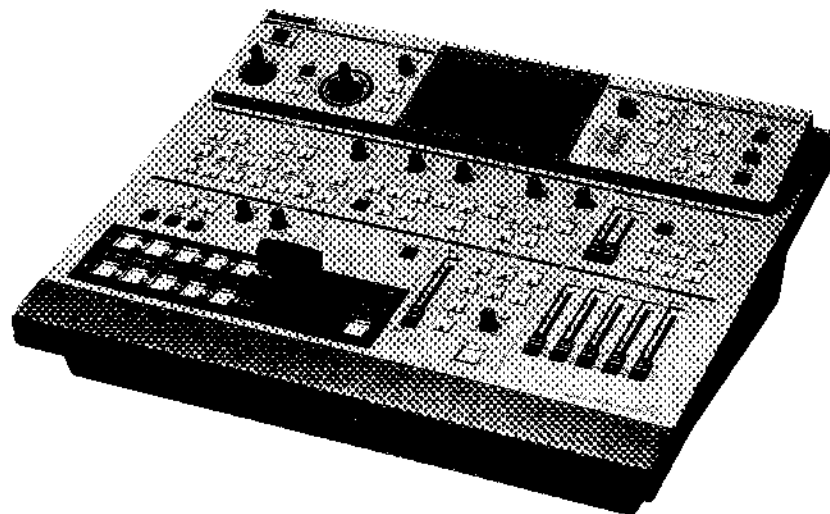

Rear

- 2-channel Digital Frame Synchronizer
- RS-422/RS-232C/GPI Editing controller Interface Digital
- Digital Special Effects
 - Strobe
 - Still
 - Mosaic
 - Negative/Positive Reversal
 - Paint (Posterization)
 - Mono
 - Multi (1/4, 1/9 or 1/16)
 - Trail
 - AV synchro
- 287 Wipe Patterns
 - Multi Wipe ($\times 3/\times 6/\times 9$ and $\times 36$)
 - Paring
 - Wipe Edge Decoration (BLINDS)
 - Compression
 - Slide
 - H/V Aspect Adjust
 - Wipe Boundary Effects
 - Joystick Positioner
 - Wipe Direction
- External Wipe Pattern Control
- Colour Corrector
- Luminance Key/Chroma Key/Down Stream Key
- Auto-Take/Auto-Fade
- Audio Follow
- Automatic Programmable Effects
- Preview/Programme Output
- Audio Mixing (A/B/AUX 1/AUX 2/MIC)
- Optional Character Generator
 - WJ-KB50
 - WJ-KB30

Downloaded from: www.broadcast-trader.com.au

WJ-MX50

Source Input:	x 4 (SOURCE 1/2/3/4)
Audio Input:	SOURCE 1/2/3/4
Auxiliary Audio Input:	x 2 (AUX 1/2) -6dBs/20k Ω , Pin-jack (unbalanced), Left and right
Microphone Input:	-60dBv/600 Ω , unbalanced, Tip-ring-sleeve type phone jack x 1
GPI Input:	Make-contact, BNC x 1
Programme Output:	x 2 (PROGRAMME OUT 1/2)
Audio Output:	PROGRAMME OUT1/2
Preview Output:	1.0Vp-p/75 Ω , PAL composite signal, BNC x 1
Headphone Output:	-20dBv to -80dBv, 8 Ω unbalanced, Tip-ring-sleeve type phone jack x 1
Power Source:	230V ~ 240V AC, 50Hz
Power Consumption:	Approx. 45W
Ambient Operating Temperature:	0°C ~ 40°C
Dimensions (W x H x D):	480 x 164 x 396 mm
Weight:	6.8 kg