


AG-A350 **Editing Controller**

Downloaded from:
www.broadcast-trader.com.au

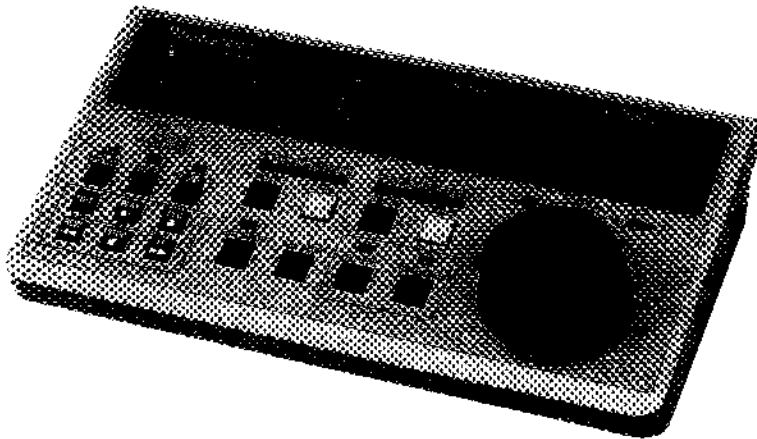

- 9-pin (RS-422A) Serial Remote for variable editing
- Compact size
- Simple and easy operation

- Insert/Assemble Editing Capability
- The large Jog/Shuttle Dial on the control panel allows easy playback speed control
- Slow-motion editing is also possible using the VTRs with AT functions
- CTL/TC Counter Display changeable by DIP switch
- Selectable Pre-Roll time (3, 5, 7, 10 sec. selectable by DIP switch)
- Error Display (Error Sound & Error No.)
- REF.VIDEO input terminal

Standard Accessory

AC Adaptor (1 pc.)

AG-A350

General

Power Source:	Controller: 6V DC, 136mA (AG-A350E) 8.5V DC, 136mA (AG-A350B)
	AC Adaptor: 230V AC, 50Hz (input) (AG-A350E) 240V AC, 50Hz (input) (AG-A350B)
Operating Temperature:	5°C to 40°C
Operating Humidity:	35% to 80%
Dimensions (W x H x D):	250 x 45 x 133 mm
Weight:	1.3 kg
Standard Cable Length:	Approx. 3 m

Editing System

Editing Accuracy:	Standard: ± 0 -frame (with reference input), ± 1 -frame (4 FCF), ± 3 -frame (8 FCF)
	Slow: ± 3 -frame
Pre-roll Time:	4-step (3, 5, 7, 10 sec.)
Editing Mode:	ASSEMBLE, VIDEO INSERT, AUDIO 1/AUDIO 2 INSERT
Editing Function:	PREVIEW, REVIEW AUDIO SPLIT
Edit Reference Signal:	CTL (CONTROL signal), TC (TIME CODE)

Connectors

To VTR:	RS-422A (9-pin) x 2
REF. Video In (BNC):	75 Ω , 1.0Vp-p, unbalanced
Connectable VTR:	S-VHS: AG-7750H, AG-7650H, AG-7700, AG-7600 Mini: AU-66H, AU-65H, AU-63H, AU-62H, AU-W35R, AU-W33R, AU-W32R

Standard Accessory

AC Adaptor x 1