
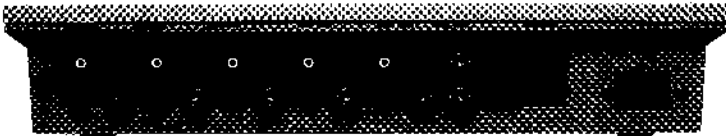


WJ-MX20 Digital AV Mixer

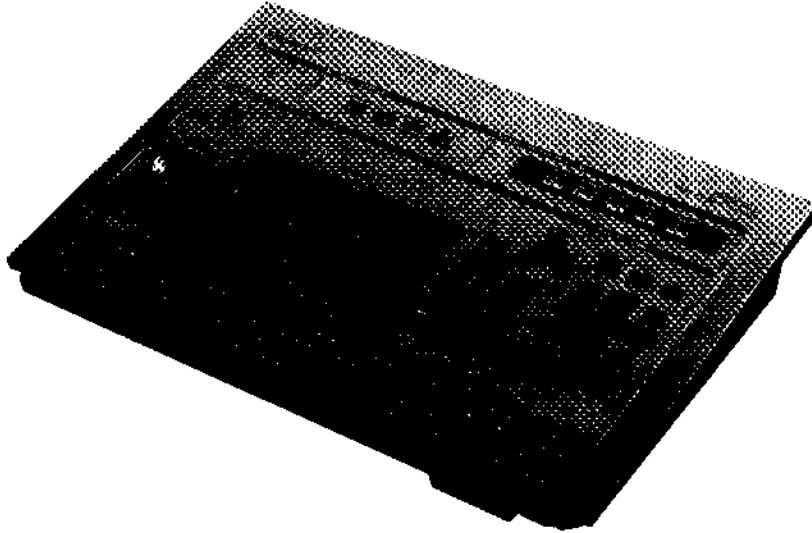


Rear

- 2-channel Digital Frame Synchronizer
- RS-422/GPI Interface
- On Screen Display
- Digital Special Effects
 - Strobe • Still • Paint • Mosaic • Negative
- 298 Wipe Patterns
 - Multi Wipe (x 3/ x 6) • Paring
 - Variable Compression • Wipe Direction
 - Joystick Positioner • Scene Grabber
- Colour Corrector
- Auto-Take/Auto-Fade
- Audio Follow
- Chroma Key/Luminance Key
- Audio Mixing
- Preview/Program Output

Standard Accessories

Power Cord 1pc.
RS-422 Cable 1pc.

Optional Accessory



WJ-KB50
5-Language & Pop-up
Menu 18 Character Size
3 Font Scroll/Crawl/
Window Wipe Date/
Time/Stopwatch



WJ-KB30
Character Generator

WJ-MX20

Source Input:	× 4 (SOURCE 1/4)
Audio Input:	SOURCE 1/2/3/4
GPI Input:	Make-contact, BNC × 1
Audio Output:	REC OUT
Preview Output:	1.0Vp-p/75Ω, PAL composite signal, pin-jack
Power Source:	220V to 240V AC, 50Hz
Power Consumption:	Approx. 15W
Ambient Operating Temperature:	0°C ~ 40°C
Dimensions (W × H × D):	420 × 300 × 88 mm
Weight:	2.5 kg