
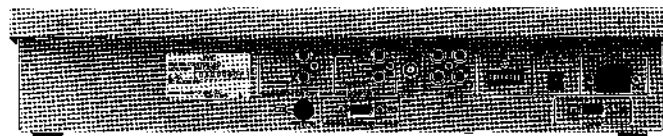


# Pre-read Editing Control Unit

## RM-G820E

- Controls D-9 Pre-Read: A/B Roll Editing and Layering Using Only Two Machines
- RS-422A Interface
- Multi-Event Editing Max. 99 events with Renumber and Ripple (EDL manage) function
- Variable Motion Control (VMC) editing and Motion Memory Editing (Max. 7 events) with BR-S525E and D-9
- Time Code (EBU LTC & VITC) and CTL Based Editing Capability
- Audio Split Editing
- Four Variable Timing GPI (General Purpose Interface) Outputs
- Audio Monitor Level Control
- Multi Purpose LCD display

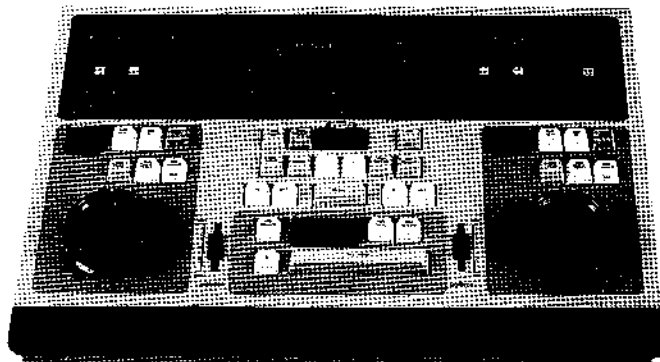

Power requirement: DC 9 V
Power consumption: 8 W
Weight: 4.8 kg (10.6 lbs)
Dimensions (W x H x D): 430 x 99 x 311 mm
Operating temperature: 5°C to 40°C
Storage temperature: -20°C to 60°C
Operating humidity: 30% to 80%
VCR control functions: PLAY, FF, REW, STOP, PAUSE/STILL, SHUTTLE SEARCH, JOG, EJECT, REC EE, REC
Editing control functions: Edit modes: Assemble and insert
Reference signals: EBU time code, CTL time code or CTL pulse
Capstan bump: ON/OFF (independent)
Editing accuracy: Timecode-referenced in capstan bump mode: ±0 frame (depending on VCR) CTL-referenced in capstan bump mode: ±2 frames (depending on VCR)
Memory capacity: 99 events

VCR interface: RS-422A (9-pin)
Preroll time: 5, 7 or 10 sec.
Number of VCRs controllable: 1 player and 1 recorder
Time counter
Counter reading display: Up to 23 hours, 59 minutes, 59 seconds, 24 frames (TC/CTL 24-hour display) from -9 hours to 9 hours, 59 minutes, 59 seconds, 24 frames (CTL 10-hour display)
Total programme time display: Maximum 11 hours, 59 minutes, 59 seconds, 24 frames
Accessories: AC adaptor, Power cord

## Optional Accessories


### VC-G9050U

9-pin Remote Control Cable (5m/16 ft.)



### SA-K66U

Rack Mount Adapter

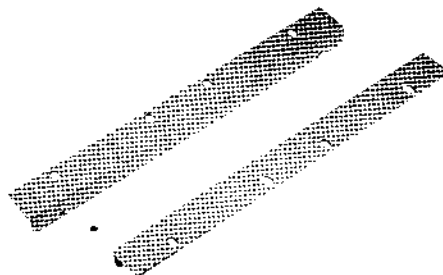

### SA-K80U

10 Numerical/Function Keypad

