
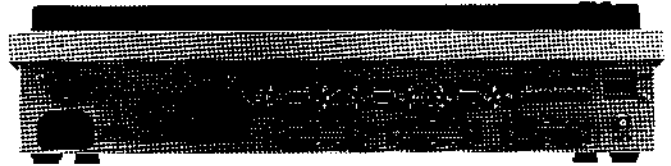


# A/B Roll Editing Controller

## RM-G860E

- A/B roll editing with two feeders
- Independent search/jog dials for players and recorder
- Serial RS-422A and parallel 45-pin remote control interfaces
- Time-code-reference editing
- Three 8-digit time counters
- Time counter and last-edit memory
- Two GPI ports for control of external equipment
- Variable pre-roll times (3, 5, 7, and 10\* seconds) with selectable capstan bump function
- Preview function
- Review function with selectable out-point-only capability (cut editing only)
- Go-To function (can operate all three VCRs simultaneously)
- Edit point trim and cancel
- Auto and Run Edit modes
- AUX mode for independent recorder operation when editing from and external source
- ALL STOP button
- Can be installed in a standard 19" rack

\* Requires DIP switch resetting.

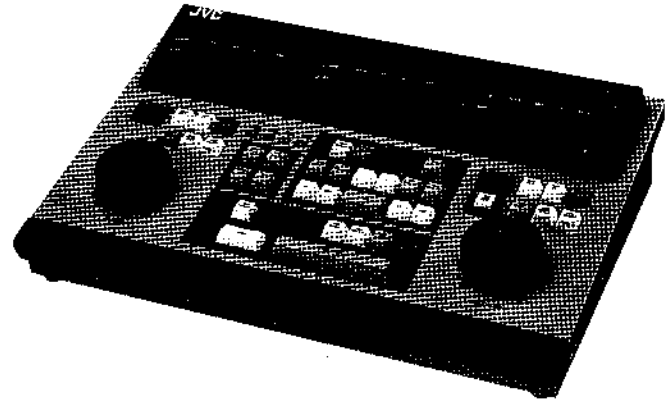

Power: AC 220 - 240 V ~ 50/60 Hz

Power consumption: 24 W

Weight: 4.8 kg.

Dimensions: 430 (W) x 99 (H) x 311 (D) mm

Operating temperature: 0°C to 40°C

Storage temperature: -20°C to 60°C

Connectors:

AC IN: 3-lead

SYNC: BNC

Composite sync 0.2 to 5.0 Vp-p

Composite video 0.5 to 2.0 Vp-p, 75 ohms, negative sync, unbalanced

Video switcher: harmonica connector

Audio mixer: harmonica connector

VTR interface: RS-422A (9-pin) or 45-pin (parallel)

VTR control functions: PLAY, FF, REW, STOP, PAUSE/STILL, SHUTTLE.

SEARCH, REC EE, JOG, EJECT, REC, EDIT (recorder side only)

Applicable VTRS:

As players

KR-M840E/KR-M820E/

KR-M800E/KR-M545E/

KR-M540E/PR-M900E/

PR-600E

BR-S811/BR-S611E/

BR-S810E/BR-S610E

} Direct

} Direct or via

SA-F911E

As recorders

KR-M840E/KR-M820E/

KR-M800E/PR-900E

BR-S811E/BR-S810E

} Direct

} Direct or via SA-F911E

Editing control functions

Edit modes: Assemble and Insert

Ref. signals: EBU time code or CTL pulse

Capstan bump: ON/OFF

Editing accuracy: Timecode-referenced in capstan

bump mode:  $\pm 0$  frame (depending on VTR)

CTL-referenced in capstan bump mode:  $\pm 2$  frames

(depending on VTR)

Time counter: Counter reading display: up to 23 hours, 59 minutes,

59 seconds, 24 frames (TC/CTL 24-hour display) from -9 hours

to 9 hours, 59 minutes, 59 seconds, 24 frames (CTL 10-hour

display)

Total programme time display: Maximum 11 hours, 59 minutes, 59

seconds, 24 frames

## Optional Accessories


SA-K66U

Rack Mount Adapter



VC-G7050U

45-pin Remote Control Cable (5 m)



VC-G9050U

9-pin Remote Control Cable (5 m)

