
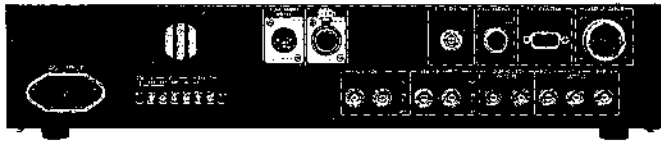


RM-P300E

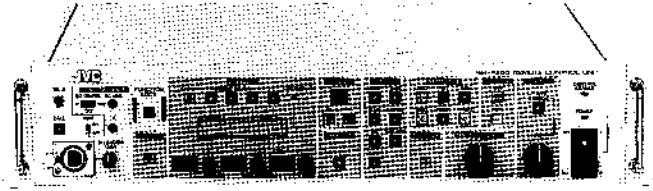

- Extendable up to between 250 and 300 m via VC-P110 series multicore cable
- Can output composite, Y/C 443 and component signals (Y, R-Y, B-Y or R, G, B selectable)
- One audio output and one programme input are available
- Can be connected to the Remote Control Panel RM-LP35U for remote operation
- LCD read out at the base station for simple operation


Input signals	
External sync signal	VBS: 1.0 Vp-p or BB: 0.45 Vp-p, 75 ohms, bridge-connectable
AUX VIDEO signal	VBS: 1.0 Vp-p, 75 ohms, VS: 1.0 Vp-p, 75 ohms, bridge-connectable
Intercom signal	2 W (-10 dB, 600 ohms, balanced) / 4 W (0 dB, 600 ohms, balanced)
Aux audio signal	-4 dB, 600 ohms, unbalanced
Tally signal	Contact supply or power (5 - 24 V DC or 6 V AC) supply
Output signals	
Test signal 1	VBS x 2, Y/C x 1, RGB/Y,R-Y,B-Y (Switchable) x 1
Video signal	VBS x 1
Audio signal	2 ch.
Power requirement	220/240 V AC, 50/60 Hz
Power consumption	115 W (incl. camera furnished with VF-P550) / 27 W (RM-P300E only)
Ambient temperature range	-10°C +45°C
Dimensions (W x H x D)	482 x 93 x 366.5 mm (19" x 3-11/16" x 14-7/16")
Weight	6.8 kg (15.0 lbs.)

Optional Accessories




RM-LP35U
(RM-P300E only)

RM-P200E

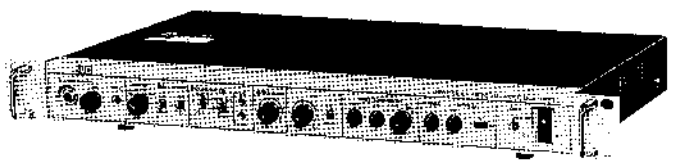

- Controls cameras KY-D29E, KY-27CE, KY-19E over extended distance of over 100 meters (325 ft.)
- Ideal for normal applications such as studio production, remote truck teleconferencing or computer graphics
- Built-in genlock function
- Serial data communications for more reliable and accurate communications between the camera and RCU
- Multi-format outlets supply; R/G/B component for computer graphics and keying plus Y/R-Y/B-Y component for MII or Y/C 443 for S-VHS products

Input signals	
Genlock signal:	Composite video signal 1 Vp-p, 75 ohms (Loop-through output) Black burst signal 0.45 Vp-p, 75 ohms (Loop-through output)
AUX signal:	Composite video signal 1 Vp-p, 75 ohms (Loop-through output)
Intercom signal:	Two-wire system, -10 dB, 600 ohms balanced
Tally signal:	Make-contact or power (5 - 24 V DC or 6 V AC) supply
Output signal	
Composite video signal:	1 Vp-p, 75 ohms x 2
R/G/B signals:	0.7 Vp-p, 75 ohms x 1 each (without sync)
Y/R-Y/B-Y signals:	Y: 1 Vp-p, R-Y: 0.486 Vp-p, B-Y: 0.486 Vp-p, 75 ohms each
Y/C 443 signals:	Y: 1 Vp-p, 75 ohms, C: 0.3 Vp-p, 75 ohms (burst level)
Intercom signal:	Two-wire system, -10 dB, 600 ohms balanced
Power requirement	220/240 V AC, 50/60 Hz
Power consumption	65 W (incl. camera furnished with Viewfinder) / 11 W (RM-P200E only)
Ambient temperature range	-10°C - +45°C
Dimensions (W x H x D)	482 x 54 x 256 mm
Weight	5.0 kg (11.1 lbs.)



VC-P110 Series 26p Multicore Cables
(5 m, 20 m, 50 m, 100 m)