



# Editing Recorder/Player S-VHS

## SR-S388E




- Easy-to-use editing recorder with high-quality S-VHS pictures and Hi-Fi audio sound
- Jog/Shuttle search
- Economical Editing with the proven RM-G800U\*
- Random Assemble Editing function
- CTL Time Code System
- Provided RS-232C remote function
- Audio dubbing function and self audio dubbing function
- On-screen menu setup
- Other Features
  - Flying erase head
  - Auto head cleaner
  - Hi-Fi audio recording level controls and indicators
  - Headphone connector with volume control
  - 2 channels for Hi-Fi audio and 1 linear channel for monaural
  - Hi-Fi audio record ON/OFF (menu switch)
  - Digital hour meter indication
  - Wired remote control (optional RM-G30U)


\* A Y/C filtering technique incorporated under license from FAROUJIA Laboratories Inc.

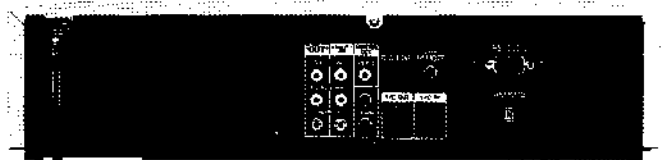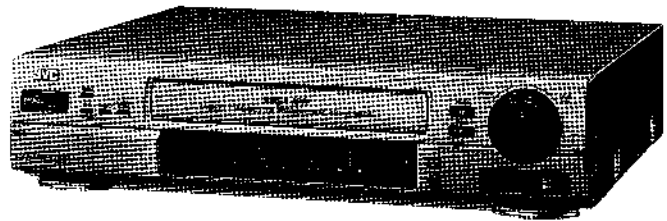

### OPTIONAL ACCESSORIES

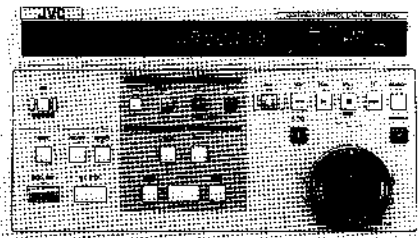

Cuts Edit Controller  
RM-G800U



VC-G8030U cable

#### GENERAL

|                          |  |
|--------------------------|--|
| Power requirement        | AC 220 V-240 V, 50/60 Hz   |
| Power consumption        | 22 W   |
| Temperature              | Operating: 5°C to 40°C(41°F to 104°F)<br>Storage: -20°C to 60°C( -4°F to 140°F)      |
| Humidity                 | Operating: 35% to 80%<br>Storage: 5% to 80%  |
| Operating position       | Horizontal only  |
| Dimensions               | 400 (W) × 94 (H) × 340 (D) mm<br>(15-5/8" × 3-3/4" × 13-7/16")                       |
| Weight:                  | 5 kg (10.6 lbs.)   |
| Format:                  | VHS/S-VHS standard   |
| Tape width               | 12.65 mm   |
| Tape speed               | (SP): 23.39 mm/sec<br>(LP): 11.70 mm/sec   |
| Maximum recording time   | (SP): 3 hours with SE-180 video cassette<br>(LP): 6 hours with SE-180 video cassette |
| Rewind/fast-forward time | Approx. 2 minutes, with SE-180 video cassette  |

#### VIDEO

|                  |  |
|------------------|--|
| Signal system    | PAL-type colour signal/PAL-type Y/C signal                     |
| Recording system | Rotary two head helical scan system<br>Luminance: FM recording |

|                       |   |
|-----------------------|---|
| Input                 | Line: 0.5 to 2.0 Vp-p 75 ohms, unbalanced<br>Y/C: Y: 1.0 Vp-p, 75 ohms, unbalanced<br>C: 0.3 Vp-p, 75ohms, unbalanced (Burst) |
| Output                | Line: 1.0 Vp-p, 75 ohms, unbalanced<br>Y/C: Y: 1.0 Vp-p, 75 ohms, unbalanced<br>C: 0.3 Vp-p, 75 ohms, unbalanced (Burst)      |
| Signal-to-noise ratio | 43 dB or more (S-VHS and SP modes)  |
| Horizontal resolution | 400 lines (S-VHS)<br>240 lines (VHS)  |

#### AUDIO

|                    |  |
|--------------------|--|
| Recording system   | 2 Hi-Fi tracks/monaural longitudinal track   |
| Input              | Line: -8 dBs, 50 k-ohms, unbalanced  |
| Output             | Line: 8 dBs, 1 k-ohm, unbalanced<br>Phones: Variable, 40 ohms, unbalanced, ø3.5, -11 dBs (max) |
| Frequency response | 20 Hz to 20 kHz (Hi-Fi)<br>100 Hz to 10 kHz (Normal, SP mode)                                  |
| Dynamic range      | 85 dB or more (Hi-Fi)  |
| Wow & flutter      | 0.006% WRMS or less (Hi-Fi)<br>0.30% RMS or less (Normal, SP mode)                             |

#### ACCESSORY

|          |               |
|----------|---------------|
| Provided | Y/C cable × 1 |
|----------|---------------|