




# Field/Studio Colour Video Monitor

## TM-1010PN 10" PAL/NTSC

- PAL/NTSC Compatible
- 16:9 Display Capability
- Tally Lamp
- Tally/Remote Connector
- Rugged Metal Cabinet
- Underscan, Pulse Cross, Blue Check, Colour OFF, External Sync
- AC Mains or 12 V DC Operation
- Dual Mountable in 19" Rack Side by Side

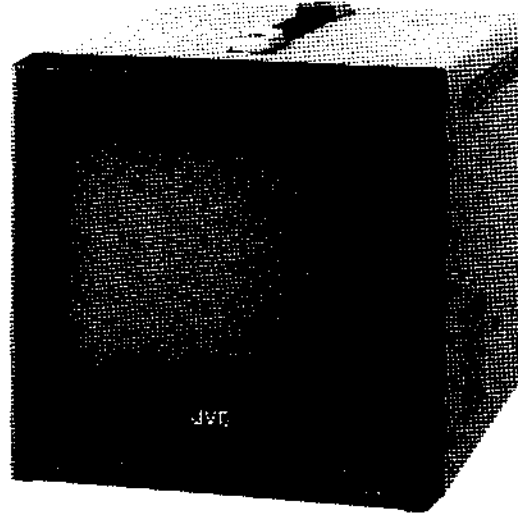

Type	Colour video monitor
Colour system	PAL/NTSC
CRT	10" (diagonally measured), in-line gun, stripe pitch 0.50 mm
Scanning frequency	H: 15.625 kHz (PAL)/15.75 kHz (NTSC) V: 50/60 Hz
Rated power	230 V AC, 50 Hz under CE 12 V DC
Horizontal resolution	More than 300 TV lines
Power consumption	0.41 A (AC), 3.3 A (DC 12 V)
Colour temperature	6500°K
Input terminals	
1) Input A:	
Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged output possible
2) Input B:	
Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged output possible
Y/C	Y: 1.0 V (p-p), 75 ohms, negative sync. C: 0.3 V (p-p), 75 ohms (PAL) 0.286 V (p-p), 75 ohms (NTSC) Auto-termination, S-4-pin x 2, bridged output possible
3) External sync:	
	Composite sync. 1.0 - 4.0 V (p-p) BNC x 2, bridged output possible
Audio terminals	RCA pin x 4 for input A & B, bridged output possible
Audio speaker	8 cm round, 1 W output
Power cord	Continental type (TM-1010PN) UK Mains Lead type (TM-1010PN-K)
Tally/remote	DIN 8-pin

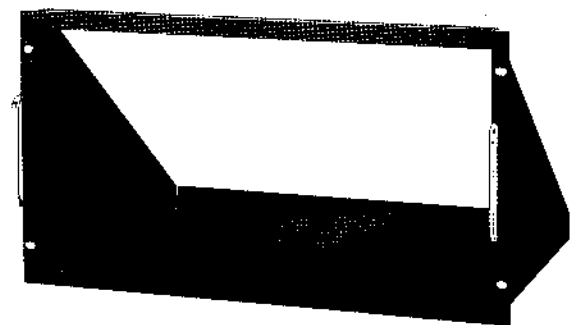

**RK-A10E  
Rack Mount Adapter  
for TM-1010PN and  
TM-A10E**