



Colour Monitors


TM-1700PN 17"

PAL/NTSC

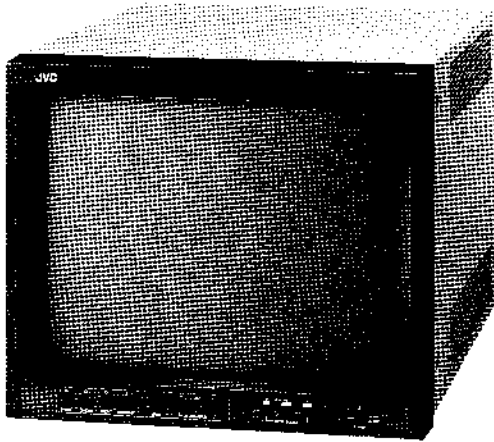

TM-2100PN 21"

PAL/NTSC

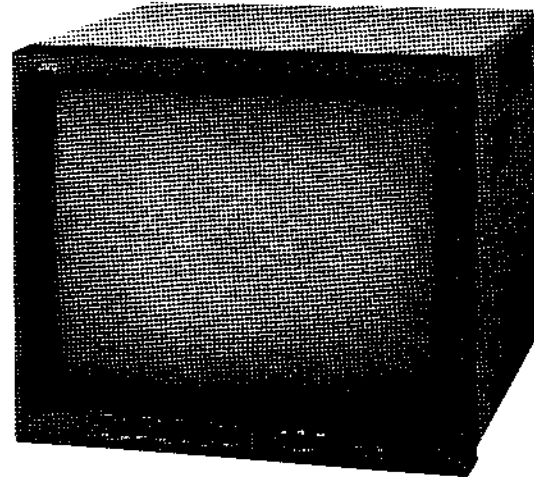

TM-1700PN:

- High 550 Horizontal TV lines resolution picture from unique 17 inch CRT
- Vertical Stripe phosphors
- 16:9 or 4:3 selectable aspect ratio
- Brightness peak suppression system reduces tube wear
- PAL/NTSC auto selection
- Built-in speaker
- User-friendly on-screen display menu
- Memory function
- Control lock
- Wired remote control
- Rugged metal cabinet
- Optional RK-1700E rack mount

| Type | Colour video monitor |
|--------------------------|--|
| Colour system | PAL/NTSC, Auto select |
| CRT | 17" diagonal, in-line guns, stripe pitch of 0.42 mm |
| Horizontal resolution | 550 TV lines |
| Colour temperature | 6,500°K / 9,300°K (selectable) |
| Power requirement | 230 V AC, 50/60 Hz |
| Power consumption | 0.6 A |
| Video Input A: Composite | 1.0 V _B (p-p), 75 ohms, negative sync, auto-termination, BNC x 2, bridged out possible |
| Video Input B: Composite | 1.0 V _B (p-p), 75 ohms, negative sync, auto-termination, BNC x 2, bridged out possible |
| Video Input B: Y/C | Y: 1.0 V (p-p), 75 ohms, negative sync C: 0.286 V (p-p), 75 ohms (NTSC) C: 0.3 V (p-p), 75 ohms (PAL) Auto termination, DIN 4-pin x 2, bridged out possible |
| Audio input / output | RCA pin x 4 for input A and input B channels, bridged out possible |
| Audio output power | 1 W |
| Power cord | Continental type (TM-1700PN) UK mains lead type (TM-1700PN-K) |
| Remote terminal | RCA pin x 2, bridged out possible |
| Dimensions | 395 (W) x 334.3 (H) x 420.5 (D) mm |

TM-2100PN:

- 450 Horizontal TV lines resolution picture from 21 inch CRT
- Vertical Stripe phosphors
- 16:9 or 4:3 selectable aspect ratio
- Brightness peak suppression system extends tube life
- PAL/NTSC auto selection
- Built-in speaker
- User-friendly on-screen graphical menu
- Memory function
- Control lock
- Wired remote control
- Rugged metal cabinet

| Type | Colour video monitor |
|--------------------------|--|
| Colour system | PAL/NTSC, Auto select |
| CRT | 21" diagonal, in-line guns, stripe pitch of 0.69 mm |
| Horizontal resolution | 450 TV lines |
| Colour temperature | 6,500°K / 9,300°K (selectable) |
| Power requirement | 230 V AC, 50/60 Hz |
| Power consumption | MAX 0.72 A |
| Video Input A: Composite | 1.0 V _B (p-p), 75 ohms, negative sync, auto-termination, BNC x 2, bridged out possible |
| Video Input B: Composite | 1.0 V _B (p-p), 75 ohms, negative sync, auto-termination, BNC x 2, bridged out possible |
| Video Input B: Y/C | Y: 1.0 V (p-p), 75 ohms, negative sync C: 0.3 V (p-p), 75 ohms (PAL) C: 0.286 V (p-p), 75 ohms (NTSC) Auto termination, DIN 4-pin x 2, bridged out possible |
| Audio input / output | RCA pin x 4 for input A and input B channels, bridged out possible |
| Audio output power | 1 W |
| Remote terminal | RCA pin x 2, bridged out possible |
| Power cord | Continental type (TM-2100PN) UK mains lead type (TM-2100PN-K) |
| Dimensions | 476 (W) x 407.5 (H) x 492 (D) mm |