




B/W Video Monitor

TM-923E 9"

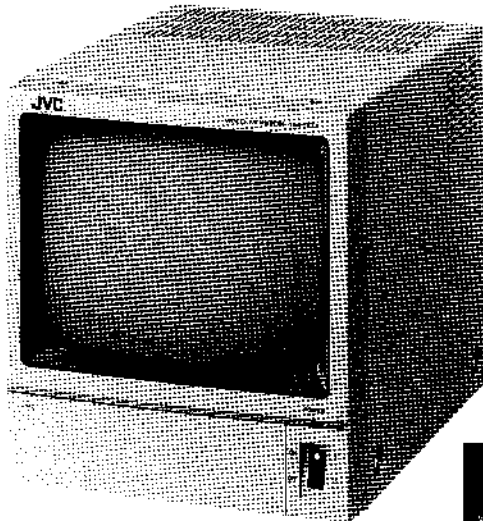

- **High Resolution Pictures**
With 700 lines of horizontal resolution, the monitor provides sharp reproduction of every detail.
- **Looped-through Output with convenient looped-through connection available.**
- **Flexible Mounting**
Two TM-923Es can be mounted together in a standard EIA 19" rack using the optional UC-P1016U Rack Mount Adapter.

TM-123E 14"

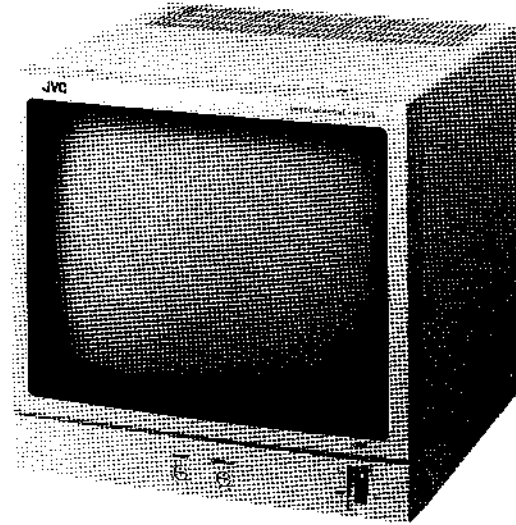

- **High Resolution Pictures**
With 700 lines of horizontal resolution, the monitor provides sharp reproduction of every detail.
- **Looped-through Output with convenient looped-through connection available.**
- **Flexible Mounting**
Can be mounted in a standard EIA 19" rack using the optional UC-P1027U Rack Mount Adapter.

Model	TM-923E	TM-123E
Picture tube	9", 90° deflection (230BTB4)	14", 90° deflection
Horizontal resolution	More than 700 lines (at centre)	←
Scanning frequencies	Horizontal: 15.625kHz , Vertical: 50Hz	←
Sequential switcher	—	—
Input	Video x 1: VS, 1.0 V (p-p), 75 ohms (BNC)	←
Output	(loop-through) Video x 1: VS, 1.0 V (p-p), 75 ohms (BNC)	←
S/N ratio	More than 55 dB	←
Video frequency response	15 kHz to 9 MHz	←
Sweep linearity	Less than 7%	←
Power supply	220 ~ 240 V AC, 50/60Hz	←
Power consumption	Approx. 25 W	Approx. 27 W
Ambient temperature range	-10°C to +50°C (14°F to 122°F)	←
Weight	Approx. 6.3 kg	Approx. 10.5 kg
Dimensions	220 (W) x 248 (H) x 280 (D) mm	316 (W) x 308 (H) x 310 (D) mm