


AG-MD830 S-VHS Video Cassette Recorder

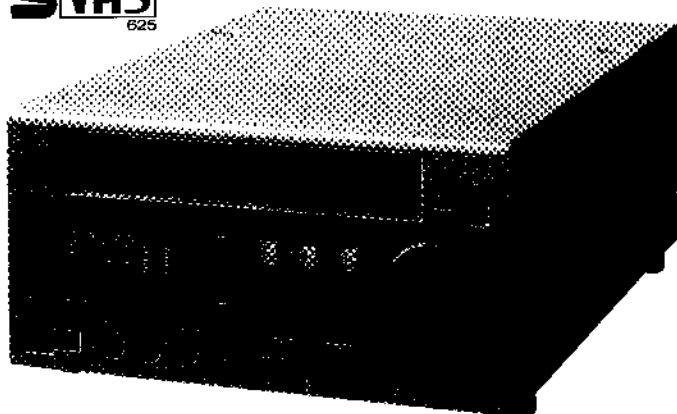

Rear

- IEC601 Approval for medical equipment safety
- S-VHS and Amorphous video heads
- IQ (Intelligent Quest) mechanism ensures high-speed response, durability, reliability and easy maintenance.

- 2-channel Hi-Fi audio, plus 2-channel normal audio with Dolby* NR
- Jog/Shuttle search and Double Fine Slow-motion playback
- Optional 34-pin parallel remote terminal (AG-IA34)
- RS-232C interface capability with optional interface board (AG-IA823) permits computer control.
- Auto-repeat playback
- Compact design and low power consumption
- Blank Search
- OSD Menu set up

Standard Accessory

S-Video Cable (4-pin) (1.5 m)




This VTR passed the test of TUV product service according to the standard of IEC601-1.

Optional Accessories



AG-IA34
34-pin
Interface
Adaptor



AG-IA823
RS-232C
Interface
Adaptor

Downloaded from:
www.broadcast-trader.com.au

AG-MD830

General

Power Source:	120 to 240V AC \pm 10%, 50/60Hz
Power Consumption:	35W
Operating Temperature:	5°C to 40°C
Operating Humidity:	35% to 80%
Dimensions (W x H x D):	270 x 131.5 x 365.5 mm
Weight:	7.0 kg

System

Audio Track:	2-track (Hi-Fi Audio), 2-track (Normal)
Tape Format:	S-VHS/VHS
FF/REW Time:	Approx. 2.5 min. with NV-SE180

Video

Horizontal Resolution:	S-VHS: more than 400-line (monochrome/colour) VHS: 240-line (monochrome), 240-line (colour)
Signal-to-Noise Ratio:	VHS: 45dB (monochrome/colour)

Audio

Frequency Response:	20Hz to 20kHz (Hi-Fi Audio), 50Hz to 12kHz (Normal)
Dynamic Range:	90dB (Hi-Fi Audio)

Input Level

Video Input:	S-Video In (4-pin): Y: 1.0Vp-p, 75 Ω , unbalanced C: 0.3Vp-p, 75 Ω , unbalanced (Burst) Video In (BNC): 1.0Vp-p, 75 Ω , unbalanced
Audio input:	Audio In (Phono x2): -8dBv, 47k Ω , unbalanced Mic In (1/4" Phono x2): -50dBv, 4.7k Ω , unbalanced

Output Level

Video Output:	AV1 & AV2 (21-pin): 1.0Vp-p, 75 Ω LINE (S4P, PHONO): 1.0Vp-p, 75 Ω
Audio Output:	AV1 & AV2 (21-pin): -8dBV, less than 1k Ω AV3 (PHONO): -8dBV, less than 1k Ω HEADPHONE (M3): -30dBV, 8 Ω

Standard Accessories

21-pin-RCA Transformer Adaptors (Input 1 pc.: VFA0151-2, Output 1 pc.: VFA0163)
Edit Cable (1 pc.)
AC Cord (1 pc.)
Remote Controller (1 pc.)
Batteries for Remote Controller (2 pcs.: UM3 or R6 type)