


DT-2930MS

29" Diagonal Multi-Scan Monitor

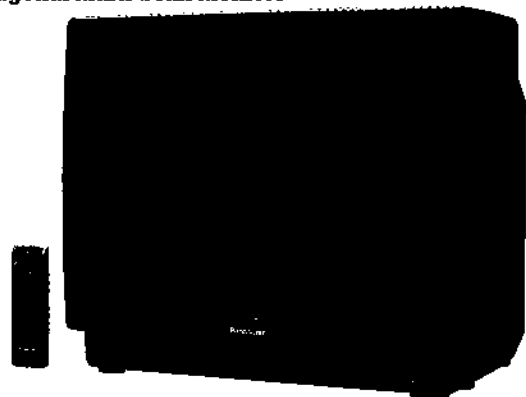

- Wide Scan Range: PAL/NTSC/VGA/SVGA/XGA* compatible (*XGA: emulator mode)
- H: 15 ~ 64kHz, V: 45 ~ 160kHz
- 14 Factory and 10 User Presets
- High-Quality 29" CRT and Built-In Stereo Speakers
- Two Types of RGB Input Connector for PC or Macintosh
- Power-Saving Function
- Max. 16-Unit Addressable Remote Control Capability
- Built-in stereo speakers and amplifier (5 W+5 W output power)
- Selectable colour temperature (3300K/6500K)
- User preset memories: volume, brightness, contrast, sharpness, colour, tint, H/V size & position, pincushion, trapezoid

Factory Preset Modes

Mode	Resolution	HZ	Hz
Video/S-Video: PAL		15.62	52
		15.75	60
		31.47	75
VGA	640 x 400	31.47	60
VGA	640 x 480	37.86	64
VGA	640 x 480	37.86	72
Macintosh: 13"	640 x 480	35.00	67
VESA	640 x 480	37.86	64
VESA	640 x 480	37.86	72
SVGA	800 x 600	35.16	56
SVGA	800 x 600	37.89	60
SVGA	800 x 600	48.08	72
8514/A* (untested)	1024 x 768	35.52	87
XGA	1024 x 768	48.38	60
XGA	1024 x 768	56.48	70
XGA	1024 x 768	57.80	72

Downloaded from: www.broadcast-trader.com.au