


SV-3900 Digital Audio Tape Deck



Downloaded from:
www.broadcast-trader.com.au

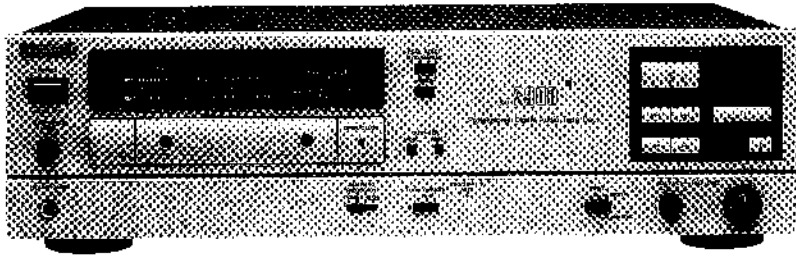

- Instrumentation-quality analogue input/output stages
- 1-bit high-precision A/D converters with 64 x oversampling
- Advanced 4-DAC System with 18-bit Resolution
- Optional SH-MK390 Remote Controller for network management of SV-3900, providing ES-bus serial control
- Bidirectional serial interface supports industry-standard ES-bus and P2 Serial Control Protocols
- Serial Copy Management System

Specifications

| | |
|----------------------------|---|
| Power Supply: | 110/127/220/240V AC, 50/60Hz |
| Power Consumption: | 35W |
| Dimensions (W x H x D): | 430 x 122 x 315 mm |
| Weight: | 6.4 kg |
| Number of Channels: | 2 channels (stereo) |
| S/N Ratio: | More than 92dB** |
| Total Harmonic Distortion: | Less than 0.05% (+4dBu, 1kHz)** Less than 0.007% (+22dBu, 1kHz)**^ |
| Input/Output: | Analogue In/Out, Headphone Out, AES/EBU In/O IEC Type II In/Out, Parallel Remote Control In, Serial Remote Control In |

Standard Accessories

Power cable (1)
Rack-mount kit
RT-RCLP Cleaning tape

Optional Accessory

SH-MK390 Serial Remote Controller