

BVF-V20W/V20WCE


Electronic B/W CRT viewfinder

- 2-inch 16:9 widescreen B/W CRT viewfinder for camcorder such as DVW-709WS/790WS series and DNW-9WS/90WS series
- High resolution—600TV lines at center in both 16:9 and 4:3 modes
- Diagonal size is 1.5-inch in 4:3 mode and 2.0-inch in 16:9 mode to ensure easy focusing even in 16:9 mode
- 16:9/4:3 automatic switching—when used in 16:9 mode, 4:3 limits and box cursors can be selected from the camera to help in shooting 16:9 material that may be converted later into the 4:3 standard
- The eye-piece is removable from the viewfinder to allow direct view of the CRT
- Tally lamp for camera operator is located on the viewfinder body for operational convenience. So that, the tally lamp can be seen even when not looking at the viewfinder screen. It also can be masked with a sliding cover.

Supplied accessories: Cushioned eyecup (1)
Operation manual (1)

Optional accessories: BKW-401, viewfinder rotation bracket
Fog-proof filter (Part No. 1-547-341-11)
Lens assembly (farsighted) (-2.8 D to +2.0D, Part No. A-8262-537-A)
Lens assembly (low magnification) (-3.6D to -0.8D, Part No. A-8262-538-A)
Lens assembly (standard magnification with special compensation for aberrations) (-3.6D to +0.4D, Part No. A-8267-737-A)
Lens assembly (high-performance triple magnification) (-3.6D to +0.4D, Part No. A-8314-798-A)
Cushioned eyecup: Pad (Part No. X-3678-187-1)
Attachment (Part No. 3-682-494-02)

Specifications

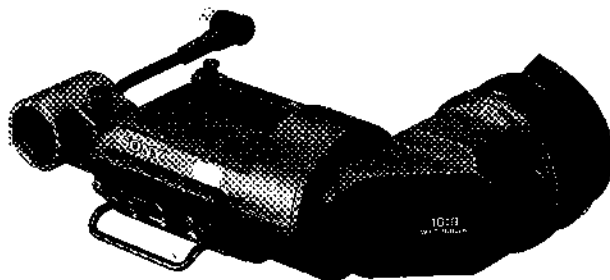

General

Power requirements: DC 9.3V
power consumption: 2.3W
Operating temperature: -20°C to +45°C (-4°F to +113°F)
Storage temperature: -20°C to +60°C (-4°F to +140°F)
External dimensions: 239(W) × 76(H) × 206.5(D) mm
(9½ × 3 × 8¼ inches)
Mass: 580g (1lb 4 oz)

Performance

CRT: 2-inch monochrome
Horizontal resolution: 600TV lines (at center)
Indicators: REC/TALLY, BATT, VTR SAVE, !