


Composite Video Switcher

•Ten Primary inputs (including colour black and colour background)
•One M/E and one KEY Bus •Two EXT KEY sources and FILL available for KEYER •One EXT KEY source and FILL available for DSK •Ten basic and eight matrix wipe patterns with modifiers •Fully adjustable internal BOX MASK and EXT MASK inputs •Three COLOUR MATTE GENERATOR for BACKGROUND, EFF/BORDER, and DSK •CHROMAKEYER (RGB or Y/R-Y/B-Y selectable) •DSK with BORDER, DROP SHADOW, OUTLINE (2H/4H) selectable FADE to BLACK (FTB) function •Auto Transition for M/E, DSK, and FTB •RS-422A interface •Communication of E-File and initial panel information with BVE-910/9000/9100 •DME-450P interface •Four Black Burst Outputs •GPI Input port for M/E, DSK, FTB, and SELECT •Two PGM Outputs and one PVW Output

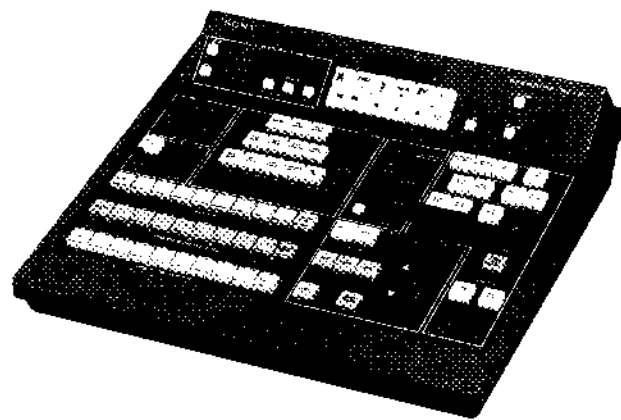

Supplied accessories: AC power cord
Control panel cable (5m)
Extension board
Operation and maintenance manual

Optional accessories: SWC-2530D Control panel cable (30m)
RMM-3000 Rack mount kit

Specifications

Power requirements: AC 100V to 240V $\pm 10\%$, 50/60Hz $\pm 10\%$
Power consumption: 125W
Operating temperature: 0° to 40°C (32° to 104°F)
Storage temperature: -20° to 60°C (-4° to 140°F)

Dimensions:

| | |
|-----------------|--|
| Control panel: | Approx. 424 (W) \times 111 (H) \times 440 (D) mm (16 $\frac{3}{4}$ \times 4 $\frac{3}{8}$ \times 17 $\frac{3}{8}$ inches) |
| Processor unit: | Approx. 424 (W) \times 132 (H) \times 350 (D) mm (16 $\frac{3}{4}$ \times 5 $\frac{1}{4}$ \times 15 $\frac{3}{4}$ inches) |

Mass:

| | |
|-----------------|-----------------------------|
| Control panel: | Approx. 4.4 kg (9 lb 11 oz) |
| Processor unit: | Approx. 13 kg (28 lb 11 oz) |

*For further information, please contact the nearest Sony office.