

CA-550(NTSC)/550P(PAL)

Camera Adaptor for BVP-550

•Furnished with a wideband triax cable interface for use with the CCU-700/500 series Camera Control Unit •High picture quality is provided through component (Y/R-Y/B-Y) transmission in the wideband triax cable •Ideal for studio use—All function switches are located at the rear in order to lower the viewfinder position and for comfortable tripod use in studios •Switchable Intercom system (Producer or Engineer line can be selected) •Provides a 26-pin connector for interface with portable VTRs via the CCZ or CCZQ cable

Supplied accessories: Operation manual (1)
Maintenance manual (1)

Optional accessories: Extension board (1)
BKP-5971, teleprompter unit (1)
COAX connector (1)

Dimensions: 193 (L) × 154 (H) × 119 (D)
(7 7/8 × 6 1/8 × 4 3/4 inches)


Specifications

General


Power requirements: DC 12V (10.5V to 17V)
Power consumption: 10W
Operating temperature: -20 °C to +45 °C (-4 °F to +113 °F)
Storage temperature: -20 °C to +50 °C (-4 °F to +122 °F)
Mass: Approx. 2.5kg (5 lb 8 oz)

Connectors

MIC IN: XLR-3-pin (Female), 600Ω, balanced, phantom +48 V, AB +12 V
DC IN: XLR-4-pin (Male), 10.5V to 17V
DC OUT: 4-pin, 10.5V to 17V
GENLOCK IN: BNC, 1.0Vp-p, 75Ω
RET OUT: BNC, 1.0Vp-p, 75Ω
RETURN CONTROL: 6-pin
EARPHONE: Mini jack, 8Ω
CAMERA I/F: 68-pin
VTR: 26-pin (CCZ type)
CCU (Triax): Kings type (UC)
Fischer Type (CE)
CCU (Coax): BNC (option)
INCOM/PGM: 1CH, Headset XLR-5-pin
RCP: 8-pin (Female)

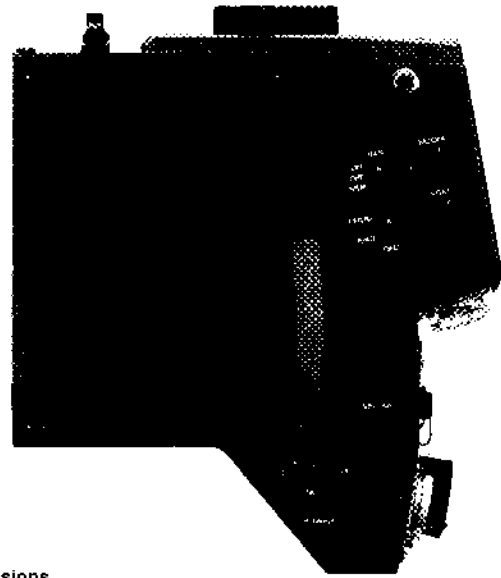

Dimensions

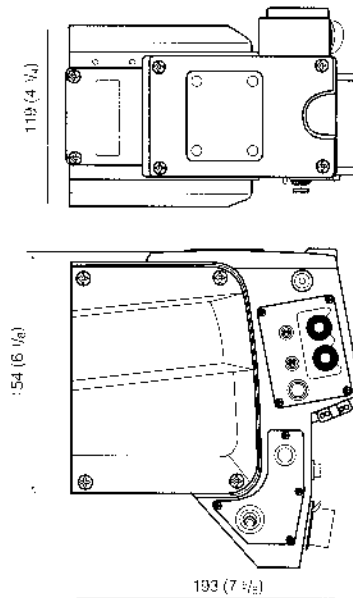

Unit: mm (inch)