

CA-701 (NTSC/PAL)

Camcorder Adaptor for DVW-707/709WS/790WS series, DNW-7/9WS/90/90WS series and DNV-5

- 4-channel audio recording capability
- Access to audio channels 3 and 4 via connectors (XLR × 2)
- Microphone phantom power
- Independent input level control and metering for channels 3 and 4
- Two SDI output (BNC × 2)
- Compact and light weight with low power consumption
- Versatile audio monitoring
- Direct connection to the camcorder via the camcorder's built-in 40-pin connector
- Able to be used with the BVF-55/55CE 5-inch monochrome viewfinder
- Flexible power connections


Supplied accessories: Operation manual (1)
Maintenance manual (1)

Optional accessories: BC-155 expansion board
BP-L60, BP-L90 battery pack
DC-L1, DC-L90 battery adaptor
WRR-860A UHF synthesized diversity tuner
AC-550/550CE AC adaptor
BVF-55/55CE 5-inch viewfinder
Rain-proof cover
(Part No.3-188-446-01)

Specification

General

Power requirement: Approx. DC12V + 5.0/-1.0V
Power consumption: Approx. 7W
Operating temperature: 0°C to +40°C (+32°F to +104°F)
Storage temperature: -20°C to +60°C (-4°F to +104°F)
Humidity: 25% to 85%(relative humidity)
Mass: Approx. 1.0kg (2 lb 3 oz)

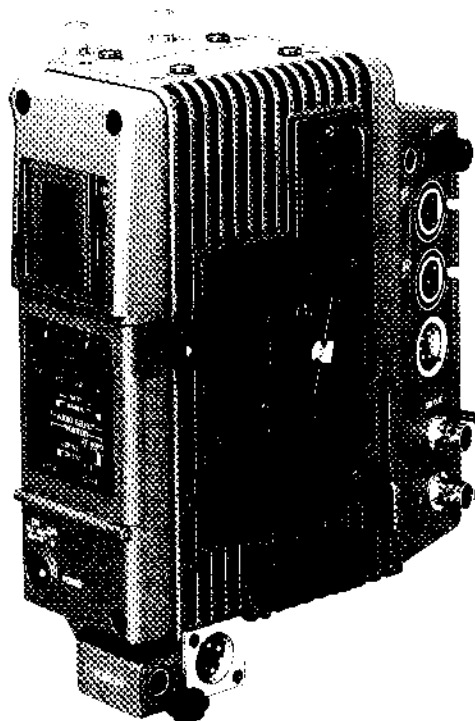

Input/output connectors

AUDIO IN CH-3/4: XLR-3-31 type (female) (2)
(-60dBu/+4dBu, 0 dBu equals 0.775 Vrms)

AUDIO OUT: XLR-5-pin type, male (stereo)

DC IN: XLR-4-pin type, male, 11 to 17 V

DC OUT: 4-pin, 11 to 17 V, maximum current 0.1 A

SDI OUT: BNC type × 2, 0.8 Vp-p, 75Ω

CAMERA: 40-pin