


7-inch HD B/W Viewfinder

- Specially designed for use with HDC-700A series—for direct camera installation
- Compact size with reduced height, light weight and energy saving design
- Wide range of mechanical positioning and fixed center of gravity
- Extremely high center resolution of 1000 TV lines and wide peaking range contribute to a very crisp image and accurate focusing
- Large, very easy to see tally lamps
- Underscan display
- 16:9/4:3 switcable
- Picture in picture for return video monitoring and HD Return video signal can be displayed
- Continuously variable peaking circuit provides a sharp image and easy focusing
- Drip-proof design is able to withstand light rain, well suited to outdoor use

*This model is used for HD/NTSC system.

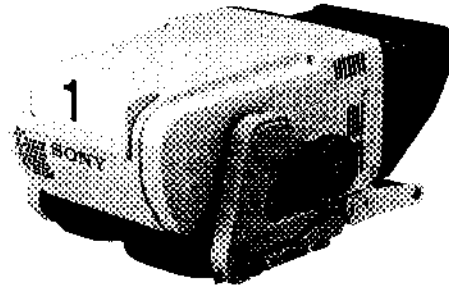

Specifications

CRT:	7-inch 90-degree deflection
Screen size:	90(H) × 120(W) mm (4:3 aspect ratio) (3 5/8 × 4 3/4 inches)
Tilting angle:	+60°/-50°
Brightness:	More than 500 cd/m ² (146 fL)
Resolution:	800 lines (center) 600 lines (corner)
Geometric distortion:	Within 2.0 %
Controls:	Contrast/Brightness/Peaking/Peaking SW/PowerSW/Scan Size SW
Aperture correction:	0 to 15 dB
Power requirements:	DC 10.7 to 17.0 VDC DC 12.0 (typical)
Power consumption:	31 W
Mass:	Approx. 5.0 kg (11 lb)
Dimensions:	Approx. 265(W) × 178(H) × 362(D) mm (10 1/2 × 7 1/8 × 14 3/8 inches)

