

Build-up unit for HDC-750A

- Specially designed for HDC-750A to use with the studio lens
- HDVF-700 HD electric viewfinder can be attached
- Friendly operation equivalent with HDC-700A
- Well-balanced and highly maneuverable
- Various functions are easily controlled from the rear panel
- Easily docked with the camera head


*This model is used for HD/NTSC system.

Specifications:

Power requirement: DC 12 V (10.5 to 17 V)
Operation temperature: -20 °C to +45 °C
Storage temperature: -20 °C to +50 °C
Mass: 14.5 kg (31 lb 15 oz)
Dimensions: 376(W) × 374(H) × 520(D) mm
(14 7/8 × 14 3/4 × 20 1/2 inches)
Input/output connectors: camera: 50-pin
lens: 36-pin
viewfinder: 25-pin

Supplied accessories: Number plate (2)
Front foot assembly (1)
Rear foot assembly (1)
3.0 mm wrench (1)
Operation manual (1)
Maintenance manual (1)
4.0 mm wrench (1)
Angle adjustment fittings (2)
Belt for cable clamp (2)
Tripod adaptor (1)
DC cable (1)

Optional accessories: HDVF-700, 7-inch B/W viewfinder
VFH-770, 7-inch viewfinder sport hood for HDVF-700

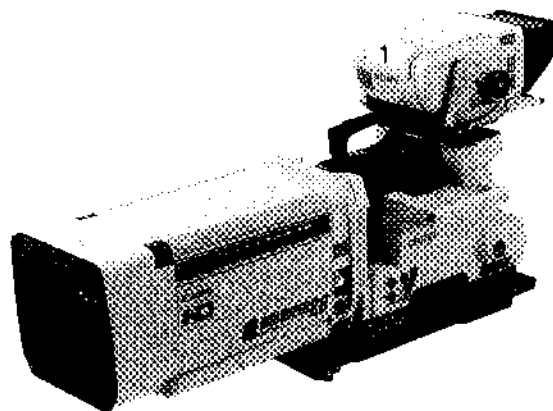

Lens, viewfinder, camera and camera adaptor are optional.