

# MAV-S100/S110

Downloaded from: [www.broadcast-trader.com.au](http://www.broadcast-trader.com.au)

## Multi Access Video and Audio Server

•Large storage capacity — total capacity of 29.4GBytes for the MAV-S100 and 63.7GBytes for the MAV-S110 •High-speed transfer rate •Excellent reliability — to assure 24-hour continuous operation in broadcast stations •A 19-inch rack and three units high compact design

### Specifications


#### General

Power requirement: AC 100 to 240V  $\pm$ 10%, 50/60 Hz  
Power consumption: 400 W (420 VA) continuous rating  
Current consumption: 4.2 A(100 V)  
Operating temperature: +5°C to +40°C (41°F to 104°F)  
Mass: Approx. 29Kg (63 lb 15 oz)  
Dimensions: 424(W)  $\times$  132(H)  $\times$  575(D) mm  
(16  $\frac{3}{4}$   $\times$  5  $\frac{1}{4}$   $\times$  22  $\frac{3}{4}$  inches)  
not including projecting parts

Recording Capacity: MAV-S100: 4.2  $\times$  7 = 29.4 GB  
MAV-S110: 9.1  $\times$  7 = 63.7 GB

#### Input/Output

SCSI: 68-pin, female (2)  
RS-232C: Setup and firmware upgrade  
with maintenance commands  
ISR port  
D-sub 25-pin, female (1)  
Status out: Status report  
(parallel, 3 outputs, operate, warning and error)  
D-sub 15-pin, female (1)

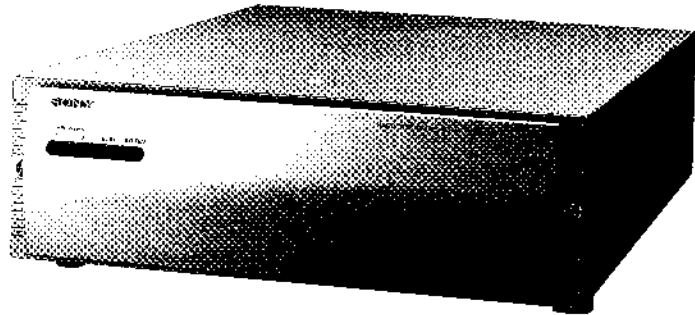

MAV-S100



MAV-S100