




PVM-146E (CCIR/EIA)

Downloaded from: www.broadcast-trader.com.au

Black & white monitor

•CCIR or EIA automatic selection •Switchable aspect ratio(4:3 and 16:9) •A high resolution of 1000TV lines at centre •Incorporates a CRT with D65 •H/V delay, Underscan capability •Equipped with a notch filter •Built-in speaker for audio monitoring •Accepts external sync •Tally input •Rack mountable with the optional mounting bracket MB-502B and slide rail kit SLR-102

Supplied accessories: AC power cord, AC plug holders, Number plate (1 set), Remote connector 8-pin, Operation manual
Optional accessories: Rack mounting bracket MB-502B, Slide rail kit SLR-102

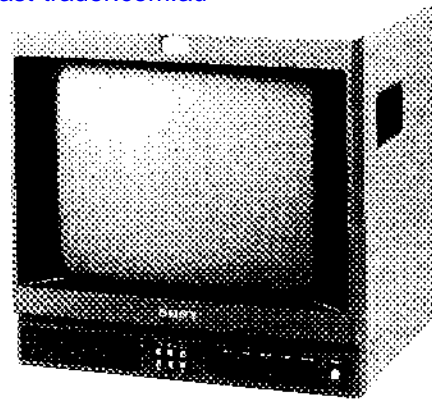


Specifications

General

Video signal system: CCIR 625 lines, 50 fields/EIA 525 lines, 60 fields (switching of CCIR to EIA or vice versa is automatically done)
Picture tube: 34cm (14-inch) CRT, 32.1cm (13-inch) visible picture measured diagonally, 90° deflection
Horizontal resolution: 1000TV lines at centre
Audio power output: Monaural, 0.5W with built-in speaker
Power requirements: AC 100 to 240V 0.3 to 0.18A, 50/60Hz
Power consumption: 25W
Dimensions: 346(W) x 340(H) x 330(D)mm (13 5/8 x 13 1/2 x 13 inches)
Mass: 11 kg (24 lb 4 oz)

VIDEO

Line A: Loop-through BNC, 1Vp-p, sync negative, Automatic 75Ω termination*
Line B: Loop-through BNC, 1Vp-p, sync negative, Automatic 75Ω termination*
External sync: Loop-through BNC, 1 to 4Vp-p negative, Automatic 75Ω termination*

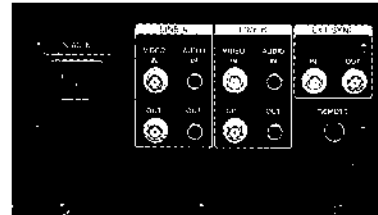

AUDIO

Line A: Loop-through Phono, -5dBu, high impedance
Line B: Loop-through Phono, -5dBu, high impedance

* 75Ω termination is automatically set to OFF when connection is made to the OUT connector