

14" PVM-14N1E/14N1A*1 (PAL/NTSC/SECAM/NTSC4.43)

Colour Video Monitor

- Resolution of 500TV lines
- Beam current feedback circuit for stability in the color balance
- Accepts composite video and Y/C signals
- On-screen menu for adjustment/operation
- Built-in speaker
- Mountable into a 19-inch EIA standard rack with the optional MB-502 and SLR-102

Optional accessories: Rack mounting bracket kit MB-502B
Slide rail kit (used with the MB-502B) SLR-102

Specifications

Video signal system: CCIR 625 lines, 50 fields/EIA 525 lines, 60 fields (switching of CCIR to EIA or vice versa is automatically done)

Colour system: PAL/NTSC/SECAM/NTSC4.43*1

Picture tube: 37.1 cm(14-inch), visible picture size 33.2 cm(min.) (13-inch) measured diagonally, 90° deflection

Horizontal resolution: 500TV lines at centre

Audio power output: Monaural, 0.8W with built-in speaker

Power requirements: AC 100 to 240V, 50/60Hz

Power consumption: 80W

Dimensions: 346(W) × 340(H) × 414(D) mm (13³/₈ × 13³/₈ × 16¹/₈ inches)

Mass: 15 kg (33 lb 1 oz)

VIDEO

LINE A*3

Loop-through BNC
1.0Vp-p, sync negative, Automatic 75Ω termination*4

Loop-through Mini DIN 4-pin
Y(luminance):
1.0Vp-p, sync negative, Automatic 75Ω termination*4

C(chrominance):
PAL: 0.3Vp-p, Automatic 75Ω termination*4
NTSC: 0.286Vp-p, Automatic 75Ω termination*4

LINE B*3

BNC
1.0Vp-p, sync negative, 75Ω

Mini DIN 4-pin
Y: 1.0Vp-p, sync negative, 75Ω
C: PAL: 0.3Vp-p, sync negative, 75Ω
NTSC: 0.286Vp-p, 75Ω

AUDIO



LINE A

Loop-through Phono
-5dBu, high impedance

LINE B

Phono
-5dBu, high impedance

Downloaded from: www.broadcast-trader.com.au

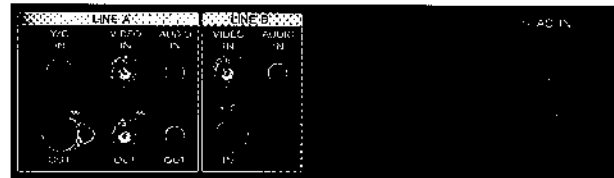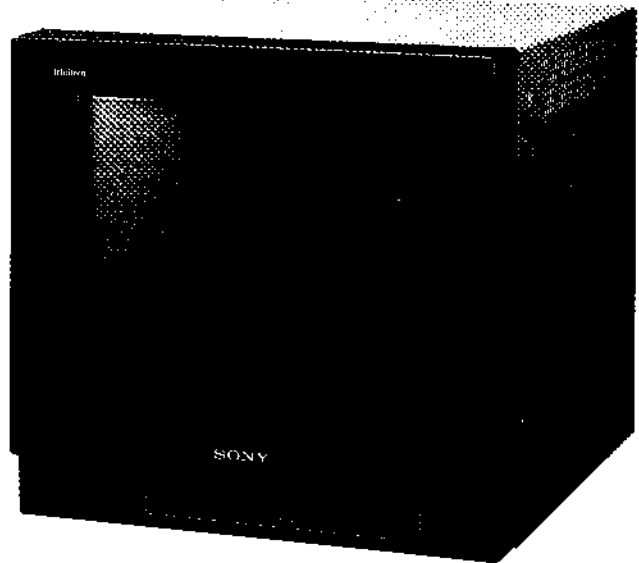

*1 PVM-14N1A is an Australian version