

20" PVM-20N1E/20N1A*1 (PAL/NTSC/SECAM/NTSC4.43)

Colour Video Monitor

- Resolution of 500TV lines
- Beam current feedback circuit for stability in the color balance
- Accepts composite video and Y/C signals
- On-screen menu for adjustment/operation
- Built-in speaker
- Mountable into a 19-inch EIA standard rack with the optional SLR-103A

Optional accessories: Slide rail kit SLR-103A

Specifications

Video signal system: CCIR 625 lines, 50 fields/EIA 525 lines, 60 fields (switching of CCIR to EIA or vice versa is automatically done)

Colour system: PAL/NTSC/SECAM/NTSC4.43*2

Picture tube: 53 cm(20-inch), visible picture size 48.0 cm(min.) (19-inch) measured diagonally, 90° deflection

Horizontal resolution: 500TV lines at centre

Audio power output: Monaural, 0.8W with built-in speaker

Power requirements: AC 100 to 240V, 50/60Hz

Power consumption: 105W

Dimensions: 449(W) × 441(H) × 502(D) mm (17¹/₁₆ × 17³/₈ × 19³/₄ inches)

Mass: 28 kg (61 lb 11 oz)

VIDEO

LINE A*3

Loop-through BNC
1.0Vp-p, sync negative,
Automatic 75Ω termination*1
Loop-through Mini DIN 4-pin
Y(luminance):
1.0Vp-p, sync negative, Automatic 75Ω
termination*1
C(chrominance):
PAL: 0.3Vp-p, Automatic 75Ω termination*1
NTSC: 0.286Vp-p, Automatic 75Ω termination*4

LINE B*3

BNC
1.0Vp-p, sync negative, 75Ω
Mini DIN 4-pin
Y: 1.0Vp-p, sync negative, 75Ω
C: PAL: 0.3Vp-p, sync negative, 75Ω
NTSC: 0.286Vp-p, 75Ω

AUDIO



LINE A

Loop-through Phono
-5dBu, high impedance

LINE B

Phono
-5dBu, high impedance

Downloaded from: www.broadcast-trader.com.au

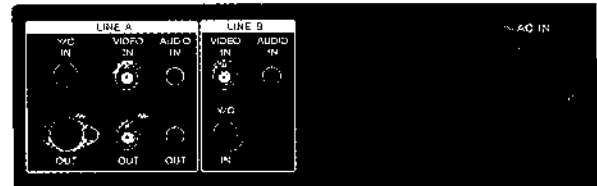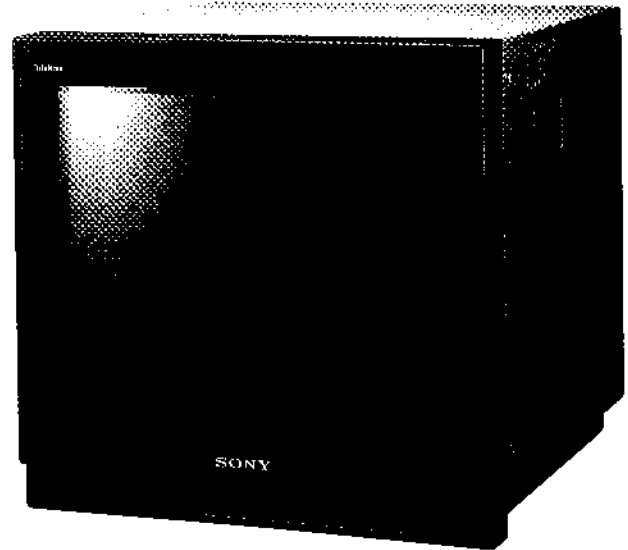

*1 PVM-20N1A is an Australian version.