

## Composite/Component Video Switcher

•Choice of composite or component version:

**BVS-3200P Composite Video Switcher**

— Accepts composite video signals

**BVS-3200CP Component Video Switcher**

— Accepts composite or a combination of RGB,

Y/R-Y/B-Y component signals

— 12-pin Component Video Connector Inputs/Outputs for Betacam VTRs are provided

•Ten Primary inputs (including colour black and colour background)

•One M/E and two KEY Busses/Processors (assignable) •KEY OVER

function •Two common EXT KEY sources and FILL available for both

KEYER •One EXT KEY source and FILL available for DSK •Ten basic

and eight matrix wipe patterns with modifiers •Fully adjustable internal

BOX MASK and EXT MASK inputs •Four COLOUR MATTE

GENERATORS for BACKGROUND, EFF/BORDER (KEY 1 and KEY

2), and DSK •CHROMAKEYER (RGB or Y/R-Y/B-Y selectable) •DSK

with BORDER, DROP SHADOW, OUTLINE-2H/4H selectable •FADE

to BLACK (FTB) function •Auto Transition for M/E, DSK, and FTB

•RS-422A interface •Communication of E-File and initial panel

information with BVE-2000/9100 •DFS-500P interface •Four Black

Burst Outputs •GPI Input port for M/E, DSK, FTB, and SELECT •Four

(BVS-3200CP)/two (BVS-3200P) PGM Outputs and one PVW Output

Supplied accessories: AC power cord  
Control panel cable (5m)  
Extension board

Optional accessories: SWC-2530D Control panel cable (30m)  
RMM-3000 Rack mount kit

## Specifications


Power requirements: AC 100 to 240V  $\pm 10\%$ , 50/60Hz  $\pm 10\%$

Power consumption: BVS-3200P: 140W

BVS-3200CP: 190W

Operating temperature: 0° to 40°C (32° to 104°F)

Storage temperature: -20° to 60°C (-4° to 140°F)

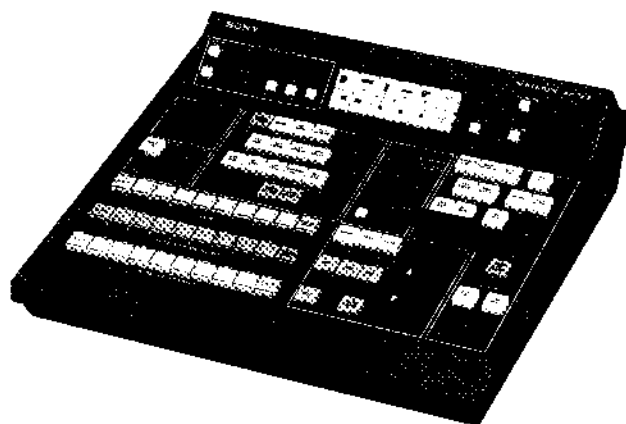

### Dimensions:

Control panel: Approx. 424 (W)  $\times$  111 (H)  $\times$  440 (D) mm  
(16 $\frac{3}{4}$   $\times$  4 $\frac{1}{8}$   $\times$  17 $\frac{3}{8}$  inches)

Processor unit: BVS-3200P:  
Approx. 424 (W)  $\times$  132 (H)  $\times$  397 (D) mm  
(16 $\frac{3}{4}$   $\times$  5 $\frac{1}{4}$   $\times$  15 $\frac{3}{4}$  inches)

BVS-3200CP:  
Approx. 424 (W)  $\times$  176 (H)  $\times$  450 (D) mm  
(16 $\frac{3}{4}$   $\times$  7  $\times$  17 $\frac{3}{4}$  inches)

### Mass:

Control panel: Approx. 4.4 kg (9 lb 11 oz)

Processor unit: BVS-3200P:  
Approx. 13 kg (28 lb 11 oz)

BVS-3200CP:  
Approx. 18 kg (39 lb 11 oz)

\*For further information, please contact the nearest Sony office.