
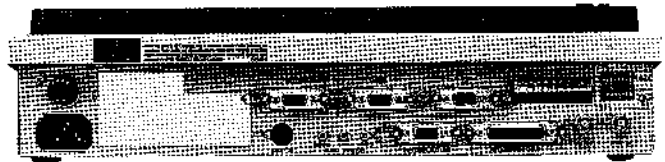


A/B Roll Editing Controller

RM-G870E

- Multi-event editing up to 127 events
- RS-422 control A/B roll editing with two feeders
- On-screen EDL display
- Capability of variable motion control
- Independent search/jog dials for players and recorder
- Audio split editing
- GPI ports and RS-422A switcher interface for connection and control of external equipment
- AUX1/AUX2 editing capability
- Variable preroll times with selectable capstan bump function
- Three 8-digit time counters
- Time code editing capability
- Audio monitor level adjustment
- First Edit function
- Preview and review functions
- Go-To function (can operate all three VCRs simultaneously)
- Edit point trim and cancel
- Comprehensive on-screen menu
- ALL STOP button
- Memory backup for editing data
- RS-232C printer interface

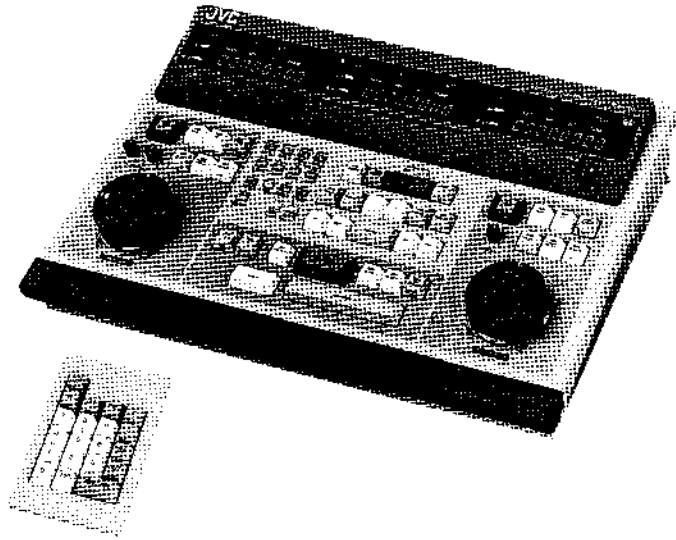

Power requirement: 220-240 V AC, 50/60 Hz

Power consumption: 24 W

Weight: 4.8 kg

Dimensions: 430 (W) x 99 (H) x 311 (D) mm

Operating temperature: 0°C to 40°C

Storage temperature: -20°C to 60°C

VTR control functions: PLAY, FF, REW, STOP, PAUSE/STILL, SHUTTLE SEARCH, REC EE, JOG, EJECT, REC

Editing control functions: Edit modes: Assemble and insert

Reference signals: EBU time code or CTL pulse

Capstan bump: ON/OFF

Editing accuracy:

Timecode-referenced in capstan bump mode: ± 0 frame (depending on VTR)

CTL-referenced in capstan bump mode: ± 2 frames (depending on VTR)

Memory capacity: 127 events

VTR interface: 9-pin (RS-422A)

Number of VTR's controllable: 2 players and 1 recorder


Time counter:

Counter reading display: Up to 23 hours, 59 minutes, 59 seconds, 24 frames (TC/CTL 24-hour display) from -9 hours, 59 minutes, 59 seconds, 24 frames (CTL 10-hour display)

Total programme time display: Maximum 11 hours, 59 minutes, 59 seconds, 24 frames

Standard accessories: SA-K80U 10-key pad x 1, Audio monitor cable x 3

VMC-Capable Professional S A/B Roll Multi-Event Editing System

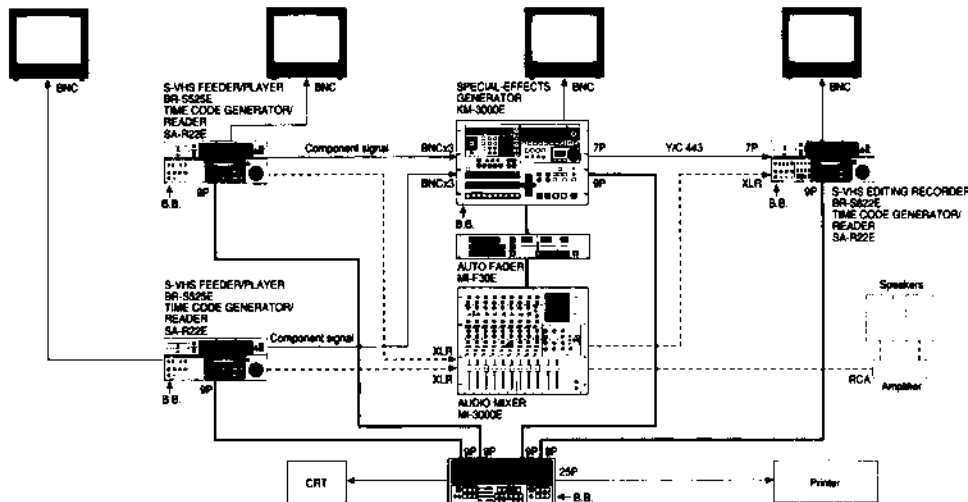

Optional Accessories

SA-K66U
Rack Mount
Adapter



VC-G9050U
9-pin Remote Control Cable (5 m)

