


Colour Monitors

TM-A10E 10" PAL

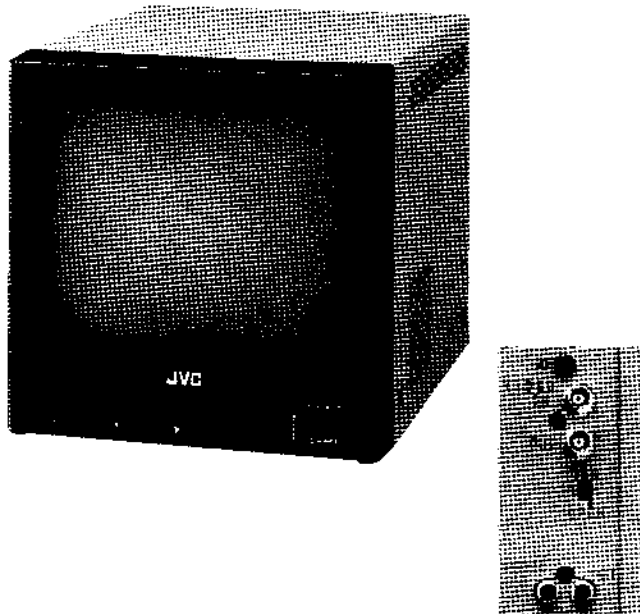

TM-A10E

- 25 cm (10") Full-Square CRT with 90° deflection, in-line guns and vertical stripe pitch of 0.50 mm
- Two units can be mounted side-by-side in a standard EIA (optional accessory: RK-A10E) and DIN rack
- Durable, space-saving metal cabinet
- Horizontal resolution of more than 300 lines
- Composite video input terminal (BNC). Bridged output provided
- Built-in 8 cm round speaker with 1 W audio output

Type	Colour video monitor
Colour system	PAL
Power requirement	230V AC, 50Hz
Power consumption	0.33A (Max.)
CRT	10" (25 cm) diagonally measured, 90° deflection, in-line guns, vertical stripe pitch of 0.50 mm
Scanning frequency	H: 15.625 kHz, V: 50 Hz
Horizontal resolution	More than 300 TV lines
Picture size (Over Scan)	Horizontal: +10%, ±5% Vertical: +5%, ±5%
Misconvergence (Max.)	Zone A: Max. 0.3 mm Zone B: Max. 0.9 mm
Colour temperature	6500°K
Audio output	1W
Speaker	8 cm round x 1
Video connection	BNC x 2 (1 for bridged output), 1.0V(p-p), 75 ohms, negative sync, termination switch provided
Audio connection	Phone x 2 (1 for bridged output)
Power Cord	Continental type (TM-A10E) UK mains lead type (TM-A10E-K)
Dimensions	222 (W) x 227 (H) x 315 (D) mm
Weight	6.9 kg

RK-A10E
Rack Mount Adapter
(Two TM-A10E monitors
can be mounted in a
standard EIA rack)

