


AG-7350 S-VHS Video Cassette Recorder

AG-7355 S-VHS Video Cassette Recorder

Downloaded from: www.broadcast-trader.com.au

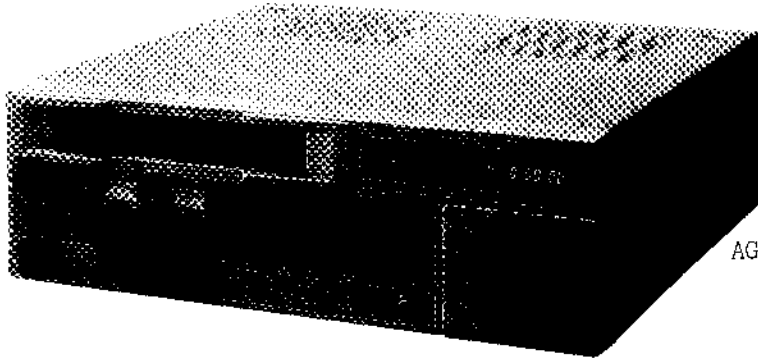

AG-7350



Rear (AG-7350)

- S-VHS for high-quality video recording and playback
- Amorphous video heads and digital Y/C decoder significantly improve picture quality.
- IQ (Intelligent Quest) mechanism ensures high-speed response, durability, reliability and easy maintenance.
- Digital frame memory provides ultra-sharp still frame reproduction. (AG-7355)

- 2-channel Hi-Fi audio, plus 2-channel normal audio with Dolby*NR
- 11-bit digital servo minimizes jitter
- Full-loading mechanism brings picture on-screen in less than one second.
- Jog/Shuttle search and Double Fine Slow-motion playback
- 34-pin parallel remote terminal
- RS-232C interface capability with optional interface board (AG-IA232TC) permits computer control.
- Time code recording and playback (when equipped with the AG-IA232TC)
- IEC601 Approval
- 72-hour memory back-up



Standard Accessory

S-Video Cable (4-pin) (1.5 m)

AG-7350/AG-7355 passes the test of TUV product service according to the standard of IEC601-1.


Optional Accessories for AG-7350/7355



AG-A600
34-pin Remote
Controller with Cable



AG-M730
Rack-Mount Adaptor



AG-IA232TC
RS-232C
Interface Board

AG-7350/AG-7355

General

Power Source:	120V to 240V AC, 50/60Hz
Power Consumption:	AG-7350: 50W AG-7355: 59W
Operating Temperature:	5°C to 40°C
Operating Humidity:	35% to 80%
Dimensions (W x H x D):	424 x 131.5 x 424 mm
Weight:	AG-7350: 11 kg AG-7355: 11.2 kg

System

Television Format:	PAL, M-NTSC
Tape Speed:	PAL: 23.99 mm/s, M-NTSC: 33.35 mm/s
Audio Track:	2-track (Hi-Fi Audio), 2-track (Normal)
Tape Format:	S-VHS/VHS
FF/REW Time:	Less than 3 min. with NV-E180

Video

Horizontal Resolution:	S-VHS: more than 400-line (monochrome/colour) VHS: 300-line (monochrome), 240-line (colour)
Signal-to-Noise Ratio:	VHS: 45dB (colour)

Audio

Frequency Response:	20Hz to 20kHz (Hi-Fi Audio), 50Hz to 12kHz (Normal)
Signal-to-Noise Ratio:	50dB (Normal/Dolby NR On)
Dynamic Range:	90dB (Hi-Fi Audio)

Input Level

Video Input:	S-Video In (4-pin): Y: 1.0Vp-p, 75Ω, unbalanced C: 0.3Vp-p, 75Ω, unbalanced (Burst) Video in (BNC): 1.0Vp-p, 75Ω, unbalanced Ext. Sync In (BNC)*: 4.0Vp-p negative pulse, 75Ω, unbalanced
Audio input:	Audio In (Phono x 4): -8dBv, 47kΩ, unbalanced Mic In (M6 x 2): -60dBv, 4.7kΩ, unbalanced

Output Level

Video Output:	S-Video Out (4-pin): Y: 1.0Vp-p, 75Ω, unbalanced C: 0.3Vp-p, 75Ω, unbalanced (Burst) Video Out (BNC x 2): 1.0Vp-p, 75Ω, unbalanced
Audio Output:	Audio Out (Phono x 2): -8dBv, 600Ω, unbalanced Headphones (M6): -60 to -20dB, 8Ω, unbalanced Audio Monitor (Phono): 0dBv, 600Ω, unbalanced

Timecode

Timecode Input (BNC)*:	1.0Vp-p, 10kΩ, unbalanced
Timecode Output (BNC)*:	2.4Vp-p, Low impedance, unbalanced

Standard Accessory

S-Video Cable (4-pin, 1.5 m)	1 pc.
------------------------------	-------

* AG-7350 only