

## PVE-500

### Editing control unit

•Three VTR control capability in A/B roll editing •Serial switcher interface via 9-pin RS-422A connection •Both parallel and serial audio mixer interface capability •Handles TC (Time Code), CTL (Control Track Signal), and RTC (Relative Time Code) as editing reference •Assemble and Insert (V, A1, A2) editing capability •Features variable speed control over VTRs equipped with Dynamic Tracking function •Up to 99 edits can be stored in the built-in EDL memory •Audio split edit capability offers effective insertion of sound effects •Snapshot memory number in the DFS-500P and the DFS-300P can be stored and recalled by the Edit Number •Reference video input allows synchronized operation with other equipments •Equipped with an RS-232C interface allowing SAVE/LOAD of the EDL data onto a floppy disk •A GPI output enables basic control of peripheral equipments such as audio tape recorders and title generators which cannot be directly interfaced with the PVE-500 •The two search dial operation enables quick and easy access to the edit points

Supplied accessories: AC power cord  
Operation manual

Optional accessories: Audio mixer control cable RCC-5AA  
9-pin remote control cable RCC-5/10/30G  
Rack mount metal RMM-500

### Specification

#### General

Power requirements: AC 100/120/220 to 240V  $\pm$ 10%, 47.5 to 63Hz  
Power consumption: 11W maximum  
Operating temperature: 5 to 40°C (41 to 104°F)  
Storage temperature: -20 to 60°C (-4 to 140°F)  
Dimensions: 390 (W)  $\times$  94 (H)  $\times$  265 (D) mm  
(15 $\frac{3}{8}$   $\times$  3 $\frac{3}{4}$   $\times$  10 $\frac{1}{2}$  inches)  
Mass: 3.2 kg (7 lb 8 oz)



#### Systems

Editing reference: CTL, RTC, SMPTE/EBU Time Code  
Edit accuracy:  $\pm$ 0 frame with time code  
 $\pm$ 1 frame with CTL

Memory capacity: 99 events

#### Controls

VTR interface: RS-422A 9-pin remote connector  
Switcher interface: RS-422A 9-pin remote connector  
Mixer interface: 9-pin serial/parallel switchable  
Controllable VTRs: 1 recorder and up to 2 players

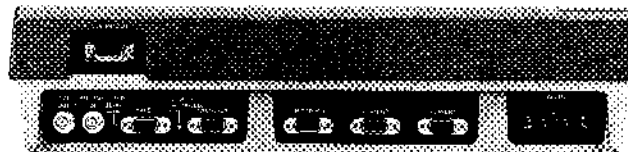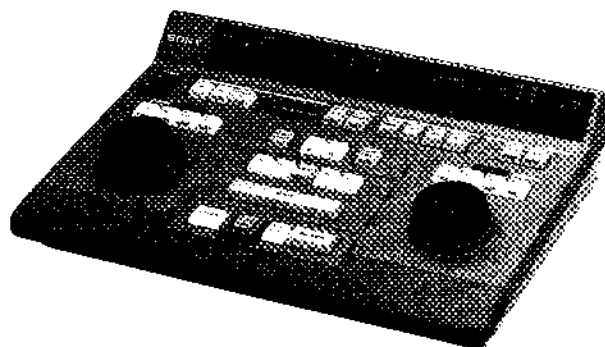

Downloaded from: [www.broadcast-trader.com.au](http://www.broadcast-trader.com.au)